# APOLLO PRO 150W

EVOLVE LIGHTING

## PROFESSIONAL SERIES LED HIGHBAY

**4000K/5700K** Colour Temperature

**5 Year** Warranty
+3 year OnSite*

**IK10** Rated

**IP65** Rated

- ✓ Ultra efficient system efficacy of up to 130lm/W
- ✓ High quality Lumileds LED chips and Mean Well Driver
- ✓ Innovative protective dust cover
- ✓ Shatterproof polycarbonate lens
- ✓ Low UGR of 25
- ✓ 3m Flex and Plug
- ✓ >60,000hrs to L80
- ✓ Carabiner included
- ✓ Epoxy anti-corrosion coating

### CODE

| |
|---|
| APOLLO150PROCW |

### LIGHTING DATA

| | |
|---|---|
| Light Source | Lumileds 3030 2D |
| Lumen Output | 19,500lm |
| Luminaire Efficacy | 130lm/W |
| Lifetime @L80 (TM-21) | >60,000hrs |
| Lifetime @L90 (TM-21) | 43,000hrs |
| CCT | 4000K / 5700K |
| CRI | >80 |
| SDCM | <3 |
| Beam Angle | 100° |
| UGR | 25 |

### DESIGN / CONSTRUCTION

| | |
|---|---|
| Body Material | ADC12 Al |
| Lens Material | Polycarbonate |
| Finish | Epoxy Anti-Corrosion Coating |
| Colour | Black |
| Mounting Options | Suspended/Surface |
| Weight | 5.72kg |

### ELECTRICAL DATA

| | |
|---|---|
| Power Supply | Mean Well ELG-150-48A |
| System Wattage | 153W |
| Mains Voltage | AC100-277V / 50-60 Hz |
| Power Factor | >0.95 |
| THD | <20% |
| Inrush Current | 65A |
| Driver Lifetime | >50,000hrs |
| Connection | 3m 3 core cable with 3-pin plug |
| Dimmable Options | DALI, 1-10V |

### TECHNICAL DATA

| | |
|---|---|
| IP Rating | IP65 |
| IK Rating | IK10 |
| Operating Temp | -30° to +45°C |
| Protection Class | Class 1 |
| Certifications | SAA, CE |
| Documentation | LM-79, LM-80, ISTMT, TM-21 |
| Warranty | Professional (5 Year product replacement, 3 year OnSite*) |

* See warranty section on our website for T&C's

# APOLLO PRO

## TECHNICAL DETAILS

EVOLVE LIGHTING

### IMAGES

### PHOTOMETRIC DIAGRAMS

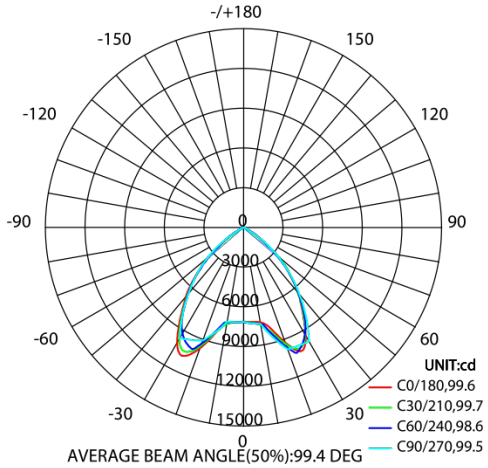


150W

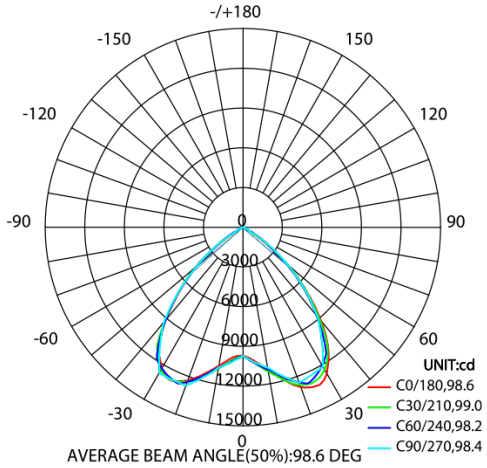


200W
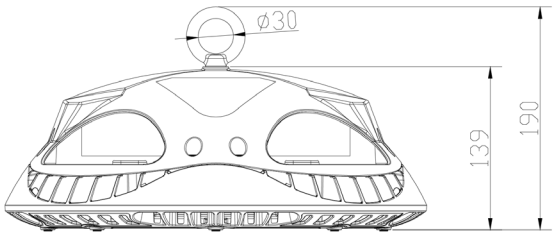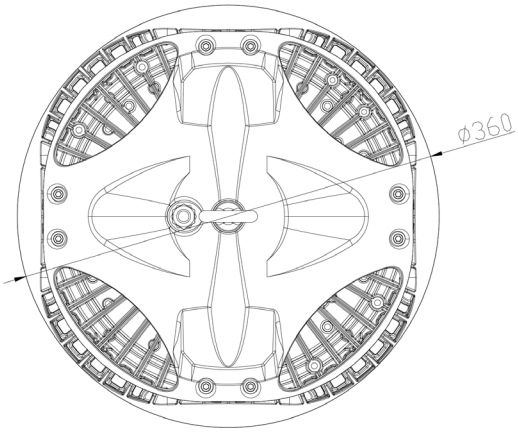
### DIMENSIONS