

DUKE DOWNLIGHT

EVOLVE
LIGHTING



4000K

Colour Temperature



3 Year

Product Replacement*



IP20

Rated



- ✓ Available in three sizes
- ✓ Faceted aluminium reflector
- ✓ Citizen LED COB
- ✓ Dimming Options

CODE	SYSTEM WATTAGE	LUMEN OUTPUT	EFFICACY	UGR	CUTOUT	SIZE
DW120-18-840	18W	1,900lm (+/- 5%)	105lm/W	22	ø120-130mm	ø145*65mm
DW120-25-840	25W	2,500lm (+/- 5%)	100lm/W	22	ø120-130mm	ø145*65mm
DW160-25-840	25W	2,500lm (+/- 5%)	100lm/W	25	ø160-170mm	ø190*75mm
DW160-35-840	35W	3,430lm (+/- 5%)	100lm/W	25	ø160-170mm	ø190*75mm
DW200-35-840	35W	3,430lm (+/- 5%)	100lm/W	25	ø200-210mm	ø225*75mm
DW200-45-840	45W	4,725lm (+/- 5%)	105lm/W	25	ø200-210mm	ø225*75mm

LIGHTING DATA

Light Source	Citizen LED COB
Lifetime	40,000hrs
CCT	4000K
CRI	≥80
SDCM	<3
Beam Angle	60°

DESIGN / CONSTRUCTION

Body Material	Aluminium
Colour	White (RAL9016)

ELECTRICAL DATA

Mains Voltage	AC200-240V / 50-60 Hz
Power Factor (Typ)	≥0.90
THD (Typ)	<18%
Dimming Options	Triac, DALI, 0-10V, SwitchDIM

TECHNICAL DATA

IP Rating	IP20
IC Rating	NON IC
Operating Temp	-20° to +45°C
Protection Class	Class II
Certifications	SAA, CE, RoHS
Warranty	3 Years*


* See warranty section on our website for T&C's

DUKE DOWNLIGHT

ESSENTIAL SERIES DOWNLIGHT

EVOLVE
LIGHTING

IMAGES

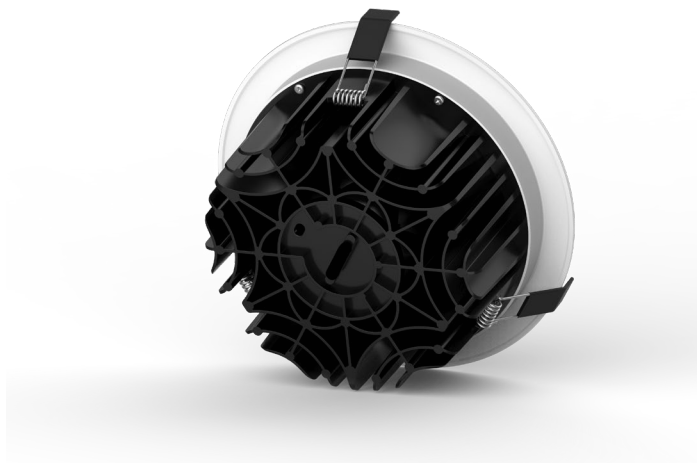

PHOTOMETRIC DIAGRAMS

