

LED CANOPY RECESSED

EVOLVE
LIGHTING

LED RECESSED LOW BAY



4000K
Colour Temperature



5 Year
Warranty



IP65
Rated



IK08
Rated

- ✓ High output Cree XTE LED Chip
- ✓ Long lasting 50,000 hours life @L70
- ✓ Mean Well Driver
- ✓ 50% energy savings over traditional fittings



CODE	POWER	LUMEN OUTPUT	DIMENSIONS	CUTOUT
CAN100REC CW	100W	11,000lm	355mm x 355mm x 90mm	370mm x 370mm
CAN150REC CW	150W	16,500lm	355mm x 355mm x 90mm	370mm x 370mm

LIGHTING DATA

Light Source	Cree XTE LED Chip
Luminaire Efficacy	110lm/W
Lifetime @L70	>50,000hrs
CCT	4000K
CRI	>70
SDCM	<3
Beam Angle	114°

ELECTRICAL DATA

Power Source	Mean Well ELG
Mains Voltage	220-240V
Inrush Current	65A
Power Factor (Typ)	>0.95
THD (Typ)	<20%
Connection	0.5m Flex + IP67 Rated Connector

DESIGN / CONSTRUCTION

Body Material	Aluminium
Lens Material	Toughened Glass
Finish	Outdoor Powder coated
Colour	White
Weight	8kg

TECHNICAL DATA


IP Rating	IP65
IK Rating	IK08
Operating Temp	-20° to +45°C
Protection Class	Class 1
Warranty	5 Year product replacement

LED CANOPY RECESSED

LED RECESSED LOW BAY


EVOLVE
LIGHTING

IMAGES

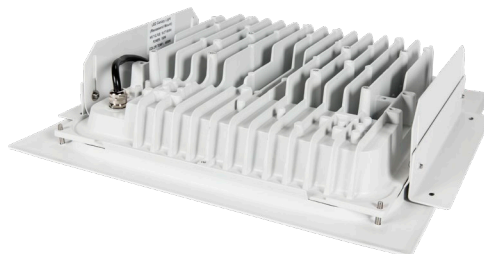

PHOTOMETRIC DIAGRAMS

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

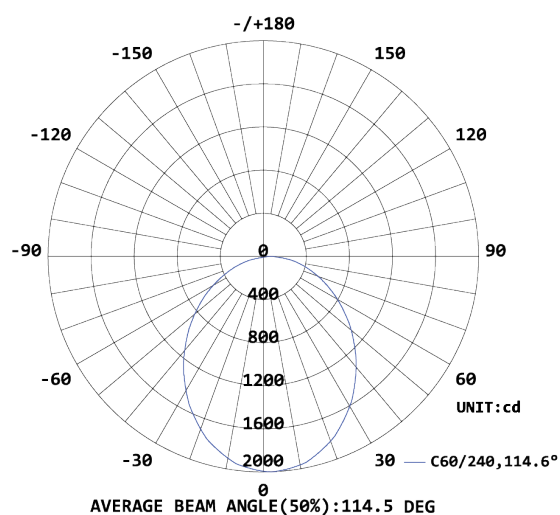

DIMENSIONS

