

VALKYRIE

EVOLVE
LIGHTING

45W 1.2M LED LINEAR PENDANT



4000K
Colour Temperature





5 Year
Warranty



UGR19

- ✓ Attractive, linear extruded aluminium body
- ✓ Low glare, UGR <19
- ✓ Long >60,000 hours life
- ✓ Soft up-lighting for increased visual comfort
- ✓ White and black colour options

Distribution:

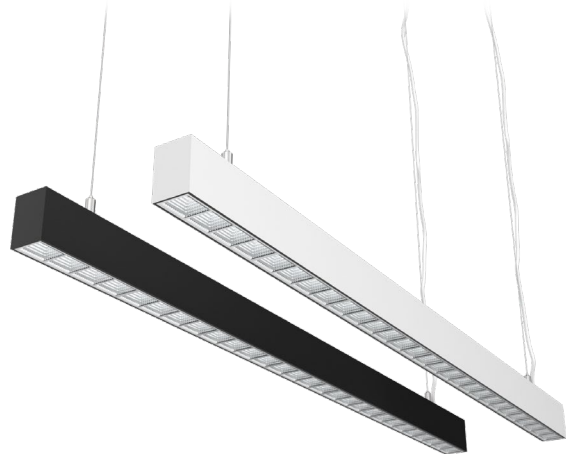

CODE	POWER	LUMEN OUTPUT	COLOUR	DISTRIBUTION	BEAM ANGLE	STOCKED
VAL1200-45-840-B	45W	5,063lm	Black	100% Down	85°x85° Down	Yes
VAL1200-45-840-W	45W	5,063lm	White	100% Down	85°x85° Down	Yes
VAL1200-45-840-B-DI	45W	5,063lm	Black	30% Up, 70% Down	120° Up, 85°x85° Down	Yes
VAL1200-45-840-W-DI	45W	5,063lm	White	30% Up, 70% Down	120° Up, 85°x85° Down	Yes

LIGHTING DATA

Light Source	Samsung SMD LED
Lifetime @L70	>60,000hrs
Luminaire Efficacy	111lm/W
CCT	4000K (CW)
CRI	82
SDCM	<4
UGR Rating	<19

DESIGN / CONSTRUCTION

Body Material	Aluminium
Finish	Powder-Coated
Dimensions	1167mm x 47mm x 65mm
Weight	2.2kg
Mounting Options	Suspended, Surface
Suspension Kit	1.5m

ELECTRICAL DATA

Power Source	BOKE LED Driver
Mains Voltage	AC220-240V / 50-60 Hz
Power Factor (Typ)	>0.95
THD (Typ)	<10%
Driver Lifetime	>50,000hrs
Flicker Free	Yes
Connection	1.5m 3 core cable
Dimming Options	DALI, SwitchDIM

TECHNICAL DATA


IP Rating	IP20
Operating Temp	-20° to +60°C
Protection Class	Class 1
Certifications	SAA
Test Reports	LM-80
Warranty	5 Year product replacement

VALKYRIE


LED LINEAR PENDANT

EVOLVE
LIGHTING


IMAGES

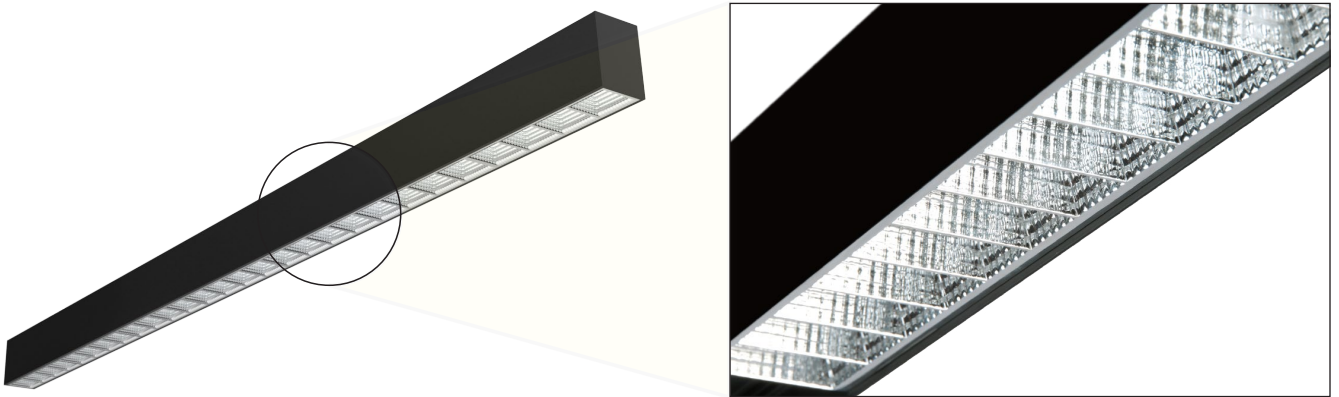

PHOTOMETRIC DIAGRAMS

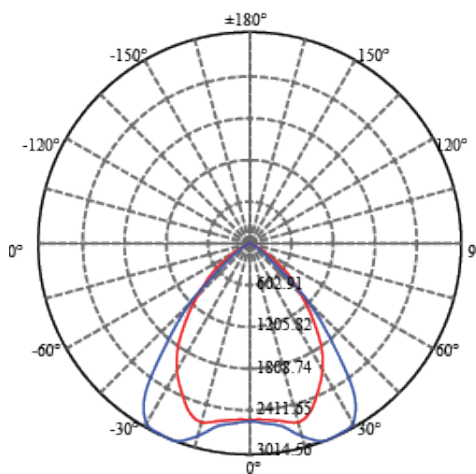

Distribution: 100% Down

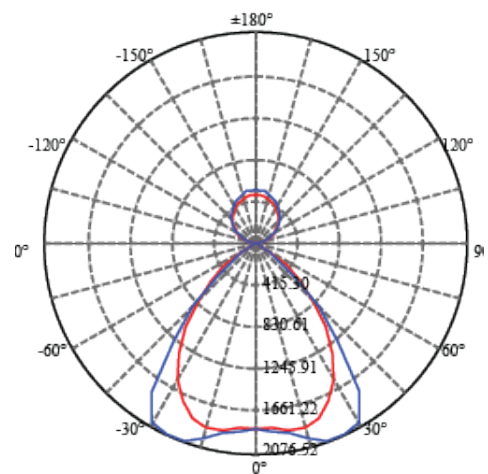

Distribution: 30% Up, 70% Down

DIMENSIONS

