

CLEAN PRO

EVOLVE
LIGHTING

PROFESSIONAL SERIES LED IP69K BATTEN



150lm/W
System Efficacy



5 Year
Warranty



IK09
Rated



IP69K
Rated

- ✓ High output LED Chip - 150lm/W
- ✓ Long lasting, >54,000 hours life to L90
- ✓ Chemical resistant PMMA body*
- ✓ 316 Stainless Steel end caps
- ✓ Quick connect system available
- ✓ Tested against water pressure of 100bar (1450psi)
- ✓ Resistant against a variety of acids, alkalis, halogens, mineral oils, fats and oils



CODE	POWER	OUTPUT	SIZE
------	-------	--------	------

CLN1500-60-840	60W	9,000lm	5 Foot
CLN1500-50-840	50W	7,500lm	5 Foot
CLN1200-40-840	40W	6,000lm	4 Foot
CLN600-20-840	20W	3,000lm	2 Foot

LIGHTING DATA

Light Source	Sanan SMD LED Chip
Luminaire Efficacy	150lm/W
Lifetime @L90	>54,000hrs
CCT	4000K (3000K, 5000K, 6000K available)
CRI	>80 (>90 available)
SDCM	<5 (<3 available)
Beam Angle	120°
UGR	<25

DESIGN / CONSTRUCTION

Body Material	PMMA
End Cap Material	316 Stainless Steel
Suspension Kit	1.5m 304 Stainless Steel
Weight	3kg

ELECTRICAL DATA

Power Supply	Boke
Input Voltage	AC200-240V / 50-60Hz
Power Factor	≥0.95
THD	<10%
Protections	SCP, OTP, OVP, OCP
Driver Lifetime	>50,000hrs
Dimmable Options	DALI, 1-10V

TECHNICAL DATA

IP Rating	IP69K
IK Rating	IK09
Operating Temp	-20°C to +45°C
Protection Class	Class 1
Certifications	SAA, CE
Warranty	5 Year product replacement


*Contact us for more info on the chemical resistances of the materials

CLEAN PRO

TECHNICAL DETAILS

EVOLVE
LIGHTING

DIMENSIONS (MM)

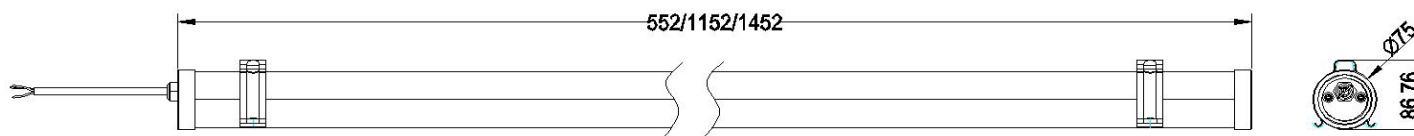

IMAGES

