

VALKYRIE WALL WASHER

EVOLVE
LIGHTING

LED LINEAR WALL WASHER



4000K
CCT



>54,000hrs
@ L70



>90
CRI




5 Year
Warranty



UGR<19

- ✓ Attractive, linear extruded aluminium body
- ✓ Low glare, UGR <19
- ✓ Long >54,000 hours life
- ✓ Uniform asymmetric distribution
- ✓ CRI>90 & R9>50 for excellent colour rendering
- ✓ Ideal for whiteboards in classrooms

Distribution:



CODE	POWER	LUMEN OUTPUT	MOUNTING	COLOUR	DIMENSIONS	WEIGHT
VALW1200-27-940-W-SUS	27W	1,350lm	Suspended	White	1167x47x65mm	2.2kg
VALW1200-27-940-W-SM	27W	1,350lm	Surface	White	1167x47x65mm	2.2kg
VALW1200-45-940-W-SUS	45W	2,270lm	Suspended	White	1167x47x65mm	2.2kg
VALW1200-45-940-W-SM	45W	2,270lm	Surface	White	1167x47x65mm	2.2kg
VALW1800-45-940-W-SUS	45W	2,270lm	Suspended	White	1828x47x65mm	3.2kg
VALW1800-45-940-W-SM	45W	2,270lm	Surface	White	1828x47x65mm	3.2kg

LIGHTING DATA

Light Source	SMD LED
Lifetime @L70 B10	>54,000hrs
Luminaire Efficacy	50lm/W
CCT	4000K
CRI	>90
R9 Value	>53
SDCM	3
UGR Rating	<19
Beam angle	60°x90°

DESIGN / CONSTRUCTION

Body Material	Aluminium
Lens Material	Polycarbonate
Finish	Powder-Coated
Suspended kit	Ceiling Rose + 1 pair of 1.5m suspension cables
Surface Kit	2 x Ceiling mounting clips

ELECTRICAL DATA

Mains Voltage	AC220-240V / 50-60 Hz
Power Factor	>0.95
THD	<10%
Driver Lifetime	>50,000hrs
Flicker Free	PstLM < 1 / SVM <0.4
Dimming	1-10V
Dimming Options	DALI, SwitchDim, Casambi

TECHNICAL DATA

IP Rating	IP20
Operating Temp	-20° to +45°C
Protection Class	Class 1
Certifications	SAA
Warranty	5 Year product replacement


VALKYRIE WALL WASHER

LED LINEAR LUMINAIRE




SUSPENDED

SURFACE

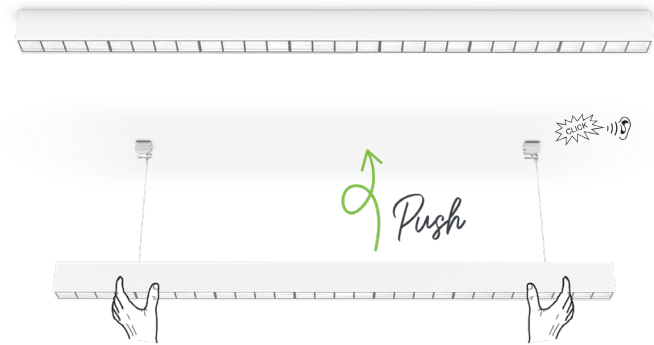

PHOTOMETRIC DIAGRAMS

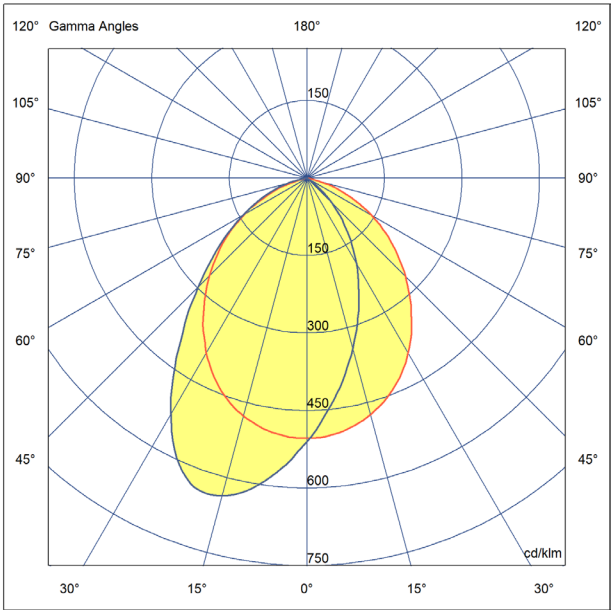

DIMENSIONS

