

STELLA MINI

RETAIL/COMMERCIAL LED HIGHBAY



4000K
CCT



>54,000hrs
@ L80



>93
CRI



5 Year
Warranty



UGR 19

EVOLVE
LIGHTING



- ✓ Wattage selectable 25W/30W/60W
- ✓ Ultra efficient system efficacy of up to 120lm/W
- ✓ High quality Lumileds LED chips and LiFud Driver
- ✓ Unobtrusive design
- ✓ Polycarbonate reflector for glare control
- ✓ Low Glare UGR19
- ✓ CRI>93 & R9>70 for excellent colour rendering
- ✓ 1.5m Flex and ceiling rose
- ✓ >54,000hrs to L80

CODE

STELLAM-60-940-70-W

LIGHTING DATA

Light Source	Lumileds SMD2835
Lumen Output	6,241lm(60W) 3,781lm(30W) 1,798lm(25W)
Luminaire Efficacy	120lm/W
Lifetime @L80 (TM-21)	>54,000hrs
CCT	4000K
CRI	>93
R9 Value	>70
SDCM	<3
Beam Angle	70°
UGR	19

DESIGN / CONSTRUCTION

Body Material	Die-cast Aluminium
Lens Material	Polycarbonate
Finish	Epoxy Anti-Corrosion Coating
Colour	White
Mounting Options	Suspended
Weight	2.5kg

ELECTRICAL DATA

System Wattage	25W, 30W, 60W		
Mains Voltage	AC220-240V / 50/60 Hz		
Power Factor	0.95		
THD	<10%		
Flicker Free	PstLM < 1 / SVM < 0.4		
Driver Lifetime	>50,000hrs		
Connection	1.5m white 3 core cable with ceiling rose		
Dimmable Options	DALI		
Inrush Current	20A		
MCB Type	B16	C10	C16
Max. connected lights	18	18	30

TECHNICAL DATA

IP Rating	IP40		
IK Rating	IK06		
Operating Temp	-20° to +45°C		
Protection Class	Class 1		
Certifications	SAA, CE, ROHS		
Documentation	LM-80, TM-21		
Warranty	5 Year product replacement		

STELLA


TECHNICAL DETAILS

EVOLVE
LIGHTING

IMAGES



PHOTOMETRIC DIAGRAMS

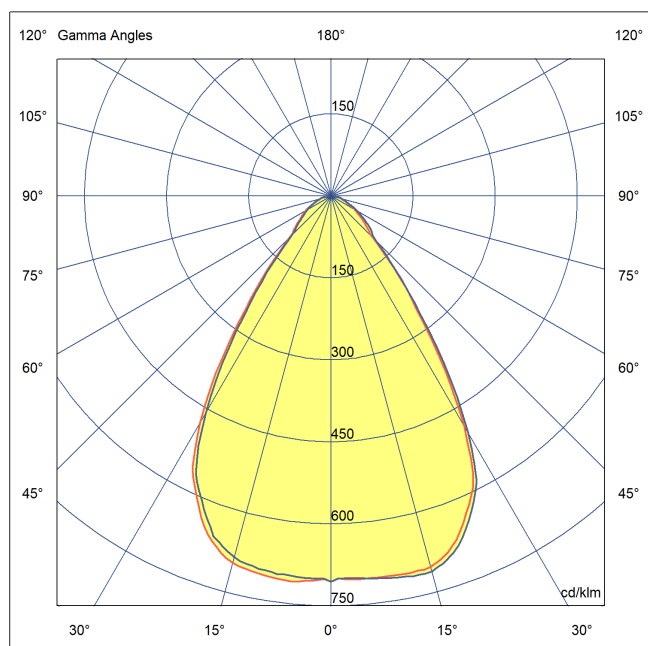

DIMENSIONS

