

SKY PRO LATTICE PANEL

EVOLVE
LIGHTING

LOW GLARE LED PANEL LIGHT



4000K
CCT



>90
CRI



UGR<19



5/7 Year
Warranty



Dimmable
Options

- ✓ Lattice pattern design
- ✓ Compliant with MoE (Ministry of Education) specification
- ✓ Low Glare UGR19 rating
- ✓ CRI>90 & R9>50 for excellent colour rendering
- ✓ 7 year warranty upgrade available
- ✓ Long lasting, >60,000 hours life
- ✓ Flicker free
- ✓ Dimming options available
- ✓ 1.2m Flex and plug included



CODE

SKYLAT6060-36-940

POWER

36W

LUMEN OUTPUT

3,600lm

EFFICACY

100lm/W

DIMENSIONS

596mm x 596mm x 62mm

LIGHTING DATA

Lifetime @L80 B10	>60,000hrs
CCT	4000K
CRI	>90
R9 Value	>50
SDCM	<3
UGR	<19
Beam Angle	85°

DESIGN / CONSTRUCTION

Type	Back lit
Base Material	Aluminium
Diffuser Material	PMMA / PS
Finish	Powder Coated
Colour	White
Seismic Restraints	Yes (2m Stainless cable)

TECHNICAL DATA

IP Rating	IP40
IK Rating	IK04
Operating Temp	-20° to +45°C
Protection Class	Class 2
Warranty	5 Year product replacement

ELECTRICAL DATA

Power Source	High efficiency LED driver
Mains Voltage	AC200-240V / 50-60 Hz
Power Factor (Typ)	>0.90
THD (Typ)	<15%
Connection	1.2m Flex and plug

PRODUCT CODES

Codes	Variant Description
SKYLAT6060-36-940-EM	Emergency
SKYLAT6060-36-940-EW7	7 year Warranty upgrade
SKYLAT6060-36-940-DIM	DALI Dimming, SwitchDIM
SKYLAT6060-36-940-CA	Casambi Dimming
SKYLAT6060-36-940-PC	Phase Cut
SKYLAT6060-36-940-_ -RF	Includes recessed kit

SKY PRO LATTICE PANEL


TECHNICAL DETAILS




MAX CIRCUIT BREAKER LOADINGS

Code	Inrush Current	Time	Circuit Breaker type	C10	C16	B16
SKYLAT6060-36-940	11.7 A	292µs	Max. No. of drivers	24	40	24

PHOTOMETRIC DIAGRAM

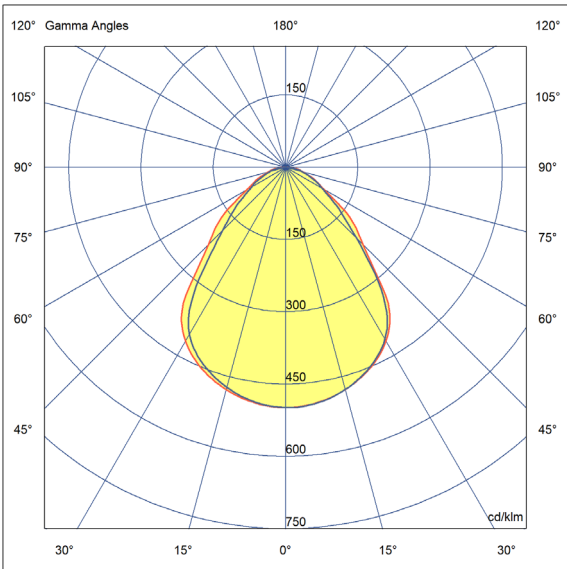

DIMENSIONS

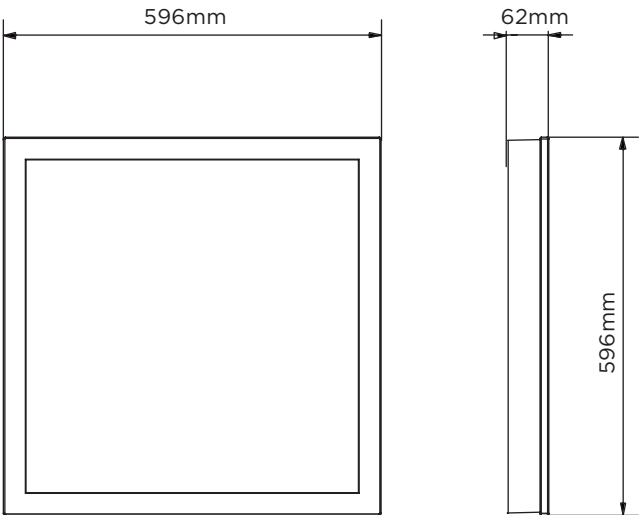

SKY PRO LATTICE PANEL

TECHNICAL DETAILS

EVOLVE
LIGHTING

IMAGES

