

SKY PANEL IP65

EVOLVE
LIGHTING

HIGH PERFORMANCE IP65 LED PANEL



4000K
CCT



IP65
Rated



120lm/W
Efficacy



5 Year
Warranty



>60,000hrs
@L70

- ✓ High system efficacy of up to 120lm/W
- ✓ Food safe with polycarbonate lens
- ✓ Long lasting, >60,000 hours life
- ✓ Flicker free
- ✓ Fully IP65 Rated
- ✓ 5 year warranty



CODE

SKYIP6060-30-840

POWER

30W

LUMEN OUTPUT

3,600lm

EFFICACY

120lm/W

DIMENSIONS

596mm x 596mm x 30mm

LIGHTING DATA

Lifetime @L80 B10	>60,000hrs
CCT	4000K
CRI	>80
R9 Value	>0
SDCM	<3
UGR	<22
Beam Angle	120°

DESIGN / CONSTRUCTION

Type	Back lit
Base Material	Aluminium
Diffuser Material	PMMA / PS
Finish	Powder Coated
Colour	White
Seismic Restraints	Yes (2m Stainless cable)

TECHNICAL DATA

IP Rating	IP65
IK Rating	IK04
Operating Temp	-20° to +45°C
Protection Class	Class 2
Warranty	5 Year product replacement

ELECTRICAL DATA

Power Source	IP65 High efficiency LED driver
Mains Voltage	AC200-240V / 50-60 Hz
Power Factor (Typ)	>0.90
THD (Typ)	<15%

PRODUCT CODES

Codes	Variant Discription
SKYIP6060-30-840-SM	Includes surface mounted kit
SKYIP6060-30-840-RF	Includes recessed kit

SKY PANEL IP65


TECHNICAL DETAILS




MAX CIRCUIT BREAKER LOADINGS

Code	Inrush Current	Time	Circuit Breaker type	C10	C16	B16
SKYIP6060-30-840	11.7 A	292µs	Max. No. of drivers	24	40	24

PHOTOMETRIC DIAGRAM

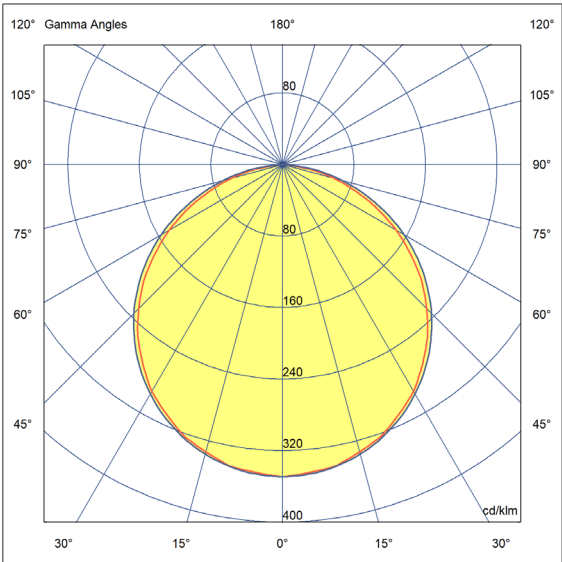

DIMENSIONS

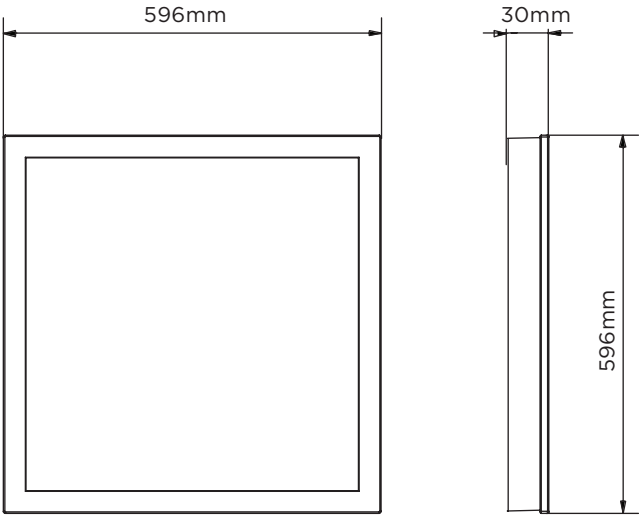

SKY PANEL IP65

TECHNICAL DETAILS

EVOLVE
LIGHTING

IMAGES

