

SENTRY TYPE IV SQUARE POLE MOUNT

EVOLVE
LIGHTING

HIGH PERFORMANCE AREA LIGHT



160lm/W
System Efficacy



>102,000hrs
@ L70




5 Year
Warranty



IP65
Rated

- ✓ Modern smooth design
- ✓ Ultra efficient system efficacy of up to 160lm/W
- ✓ High quality Lumileds LED chips
- ✓ Long lasting, >102,000 hours life to L70
- ✓ Self cleaning design
- ✓ Internal glare shields available
- ✓ Dark Sky friendly (at 3000K, 2200K)
- ✓ Interpon polyester coating for excellent weatherability

Distribution:



CODE	POWER	OUTPUT	EFFICACY
------	-------	--------	----------

SEN-100-740-B-IV-SPM	100W	15,363lm	152lm/W
SEN-70-740-B-IV-SPM	70W	11,359lm	160lm/W
SEN-50-740-B-IV-SPM	50W	7,539lm	148lm/W
SEN-30-740-B-IV-SPM	30W	4,903lm	157lm/W

LIGHTING DATA

Light Source	Lumileds LED Chip
Lifetime @L70	>102,000hrs
CCT	4000K, 3000K (2200K, 5000K available on request)
CRI	>70 (>80 available on request)
SDCM	<3
Beam Angle	Type IV

TECHNICAL DATA

IP Rating	IP65
IK Rating	IK09
Salt Spray Test	1000hrs
Operating Temp	-20° to +45°C
Protection Class	Class 1
Certifications	SAA, CE
Warranty	5 Year product replacement

DESIGN / CONSTRUCTION

Body Material	Aluminium
Optics Material	PMMA
Lens Material	Toughened glass
Coatings	Pure Epoxy Primer Interpon Polyester D1010
Colour	Graphite black (RAL9011)
Weight	4.76kg
EPA	0.036m2
Mounting	Square pole mount

ELECTRICAL DATA



Power Supply	Inventronics Driver
Input Voltage	AC200-240V / 50-60 Hz
Power Factor (Typ)	≥0.95
THD (Typ)	<10%
Surge Protection	DM 6kV, CM 10kV
Protections	SCP, OTP, OVP, OCP
Driver Lifetime	100,000hrs
Connection	1.5m, 3 core cable

SENTRY TYPE IV SQUARE POLE MOUNT


TECHNICAL DETAILS

PHOTOMETRIC DIAGRAMS

WITH INTERNAL GLARE SHIELDS

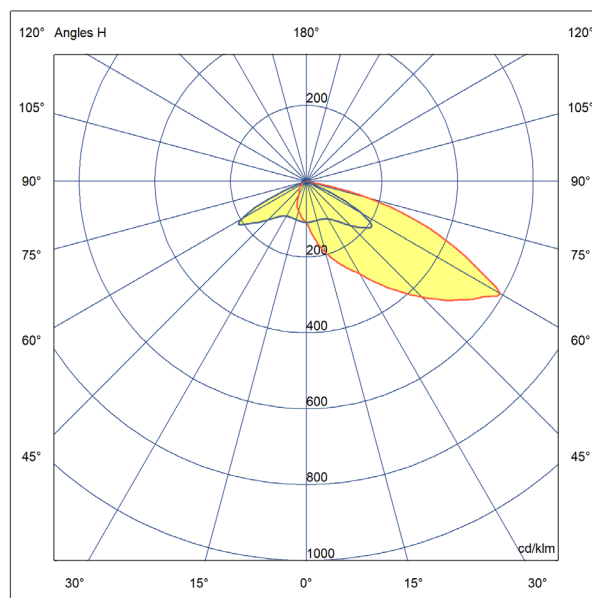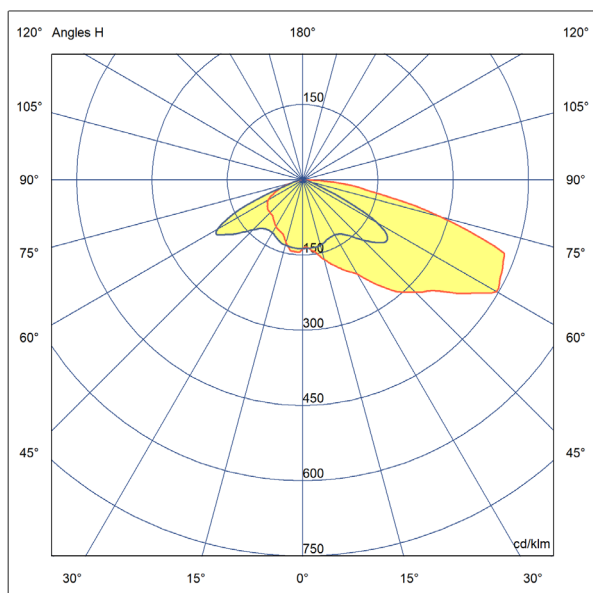


IMAGES

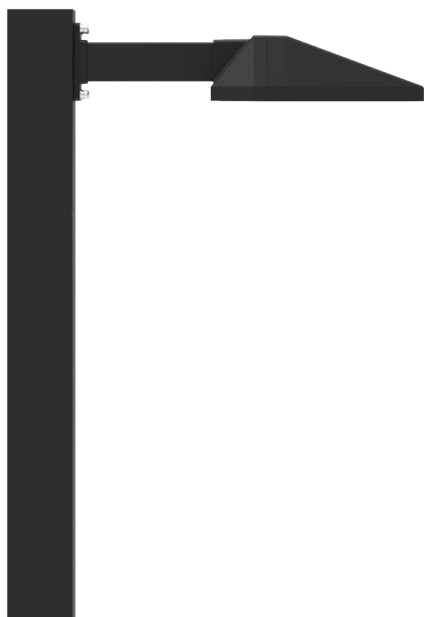

SENTRY TYPE IV SQUARE POLE MOUNT

TECHNICAL DETAILS

DIMENSIONS

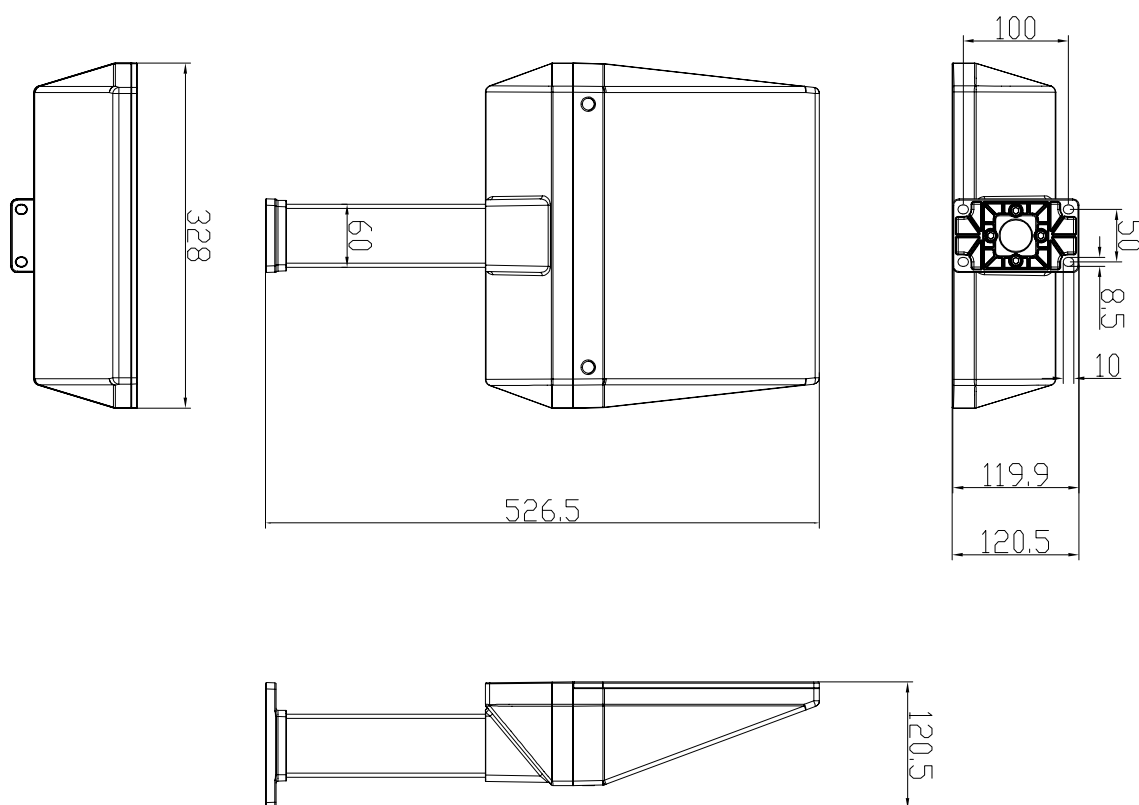

MOUNTING DIMENSIONS

