

LED ALPHA

LED LOW GLARE LUMINAIRE



4000K
Colour Temperature




5 Year
Warranty



Low Glare
UGR<19



Dimmable
Options Available

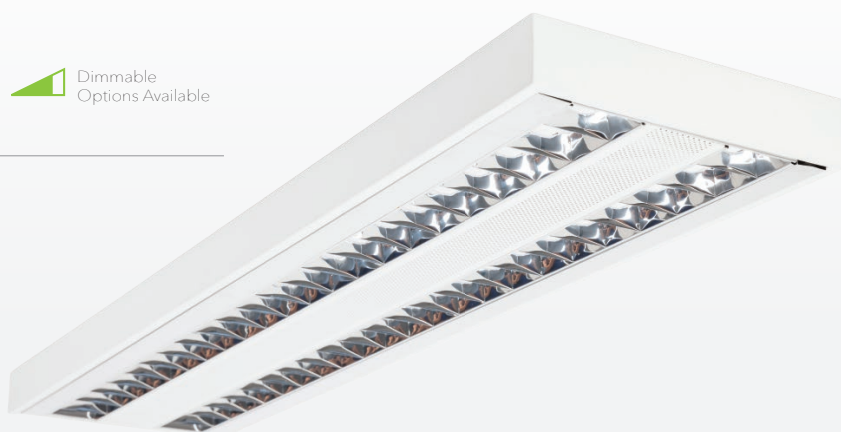

FEATURES

- Multiple mounting options
- Louvred for low glare
- Dimming options available

CODE	POWER	LUMEN OUTPUT	EFFICACY	DIMENSIONS
ALPHA310LED CW	30W	2,600lm	87lm/W	595mm x 595mm
ALPHA220LED-840	38W	3,534lm	93lm/W	1195mm x 295mm
ALPHA320LED-840	58W	5,500lm	95lm/W	1195mm x 595mm

LIGHTING DATA

LIGHT SOURCE	SMD LED Chip
LIFE SPAN @L70	60,000hrs
CCT	4000K
SDCM	<3
CRI	>80
UGR	<19

ELECTRICAL DATA

POWER SUPPLY	Osram LED Driver
MAINS VOLTAGE	240 V
POWER FACTOR	>0.96
DIMMING OPTIONS	DALI, SwitchDim, DSI

DESIGN / CONSTRUCTION

BODY MATERIAL	Aluminium
LOUVER MATERIAL	Pure Aluminium
COLOUR	White


TECHNICAL DATA

IP RATING	IP20
OPERATING TEMP	-20° to +45°C
PROTECTION CLASS	Class 1
WARRANTY	Standard 5 year warranty


LED ALPHA

LED LOW GLARE LUMINAIRE

MOUNTING OPTIONS



SURFACE



SUSPENDED



RECESSED T-RAIL

Suspension kit code

ALPHASUS

IMAGES

