

APOLLO PRO 200W

EVOLVE
LIGHTING

PROFESSIONAL SERIES LED HIGHBAY



4000K/5700K
Colour
Temperature



5 Year
Warranty
+3 year OnSite*



IK10
Rated



IP65
Rated

- ✓ Ultra efficient system efficacy of up to 130lm/W
- ✓ High quality Lumileds LED chips and Mean Well Driver
- ✓ Innovative protective dust cover
- ✓ Shatterproof polycarbonate lens
- ✓ Wide beam reflector
- ✓ 3m Flex and Plug
- ✓ >60,000hrs to L80
- ✓ Carabiner included
- ✓ Epoxy anti-corrosion coating



CODE

APOLLO200PROCW

LIGHTING DATA

Light Source	Lumileds 3030 2D
Lumen Output	26,000lm
Luminaire Efficacy	130lm/W
Lifetime @L80 (TM-21)	>60,000hrs
Lifetime @L90 (TM-21)	43,000hrs
CCT	4000K / 5700K
CRI	>80
SDCM	<3
Beam Angle	100°
UGR	28

DESIGN / CONSTRUCTION

Body Material	ADC12 Al
Lens Material	Polycarbonate
Finish	Epoxy Anti-Corrosion Coating
Colour	Black
Mounting Options	Suspended/Surface
Weight	6kg

ELECTRICAL DATA

Power Supply	Mean Well ELG-240-48A
System Wattage	205W
Mains Voltage	AC100-277V / 50-60 Hz
Power Factor	>0.95
THD	<20%
Inrush Current	60A
Driver Lifetime	>50,000hrs
Connection	3m 3 core cable with 3-pin plug
Dimmable Options	DALI, 1-10V

TECHNICAL DATA

IP Rating	IP65
IK Rating	IK10
Operating Temp	-30° to +45°C
Protection Class	Class 1
Certifications	SAA, CE
Documentation	LM-79, LM-80, ISTMT, TM-21
Warranty	Professional (5 Year product replacement, 3 year OnSite*)

* See warranty section on our website for T&C's

APOLLO PRO


TECHNICAL DETAILS

EVOLVE
LIGHTING


IMAGES



PHOTOMETRIC DIAGRAMS

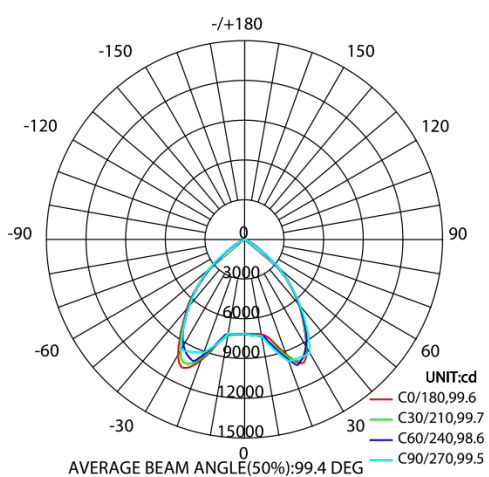

150W

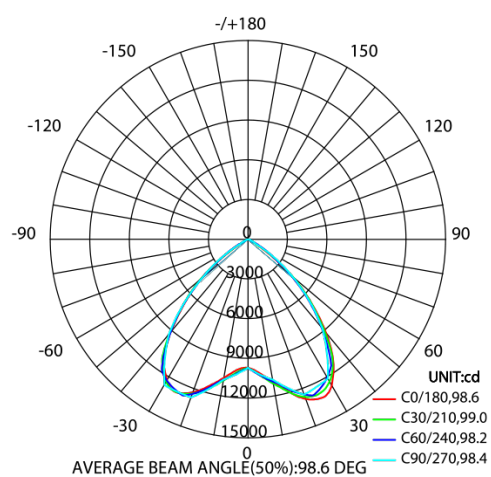

200W

DIMENSIONS

