

PRIME INSTALLATION INSTRUCTIONS

FOUNDATION SEIRES PANEL

EVOLVE
LIGHTING



BEFORE YOU START

IMPORTANT: Read all instructions before installing fixtures. Retain for future reference.

SAFETY: For your safety, this fixture must be wired in accordance to local electrical regulation, and to the fixtures specific power requirements and attributes. All work should be done by a qualified electrician or installer.

WARNING: Make certain power is **OFF** from the electrical panel before starting installation or attempting any maintenance.

MODEL INFORMATION

CODE	POWER	LUMEN OUTPUT	DIMENSIONS
PRIME1260-42-840	42W	5,000lm	1195x595x34mm
PRIME1230-30-840	30W	3,600lm	1195x295x28mm
PRIME6060-30-840	30W	3,600lm	595x595x28mm

* Wattage set out of the factory, see chart on page 2 for full list of wattages and outputs

TECHNICAL SPECIFICATIONS

Mains Voltage	AC220-240V / 50-60 Hz
Flicker-free	Pst LM <1, SVM <0.4
Operating Temp	-20° to +40°C

IP Rating	IP40
IK Rating	IK04
Certifications	SAA
Warranty	5 Year product replacement

MAX CIRCUIT BREAKER

Code	Inrush Current	Time	Circuit Breaker type	C10	C16	B10	B16
PRIME1260-42-840	≤35A	180μs	Max. No. of drivers	25	41	15	24
PRIME1230-30-840	≤27A	154μs		34	56	20	33
PRIME6060-30-840	≤27A	154μs		34	56	20	33

WARRANTY INFORMATION







This luminaire is warranted for a period of 5 years from the date of purchase. The backup battery pack in the emergency version is warranted for a period of 24 months. The warranty could be invalidated should the light fitting not be installed according to these instructions, outside the scope of the specification or the product has been altered or tampered within any way.

Please see website for terms and conditions.

PRIME PANEL

INSTALLATION INSTRUCTIONS

INSTALLATION

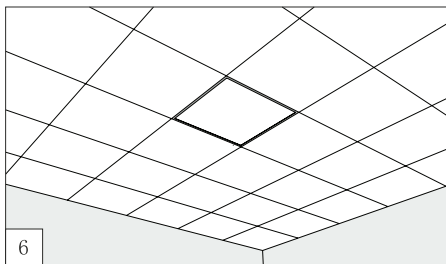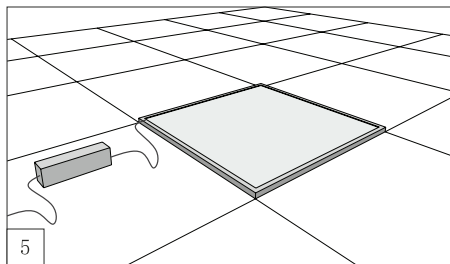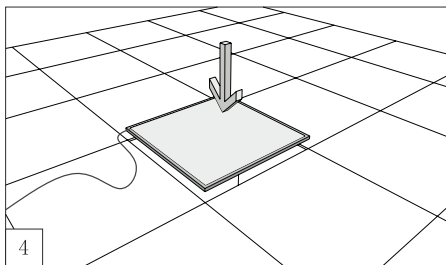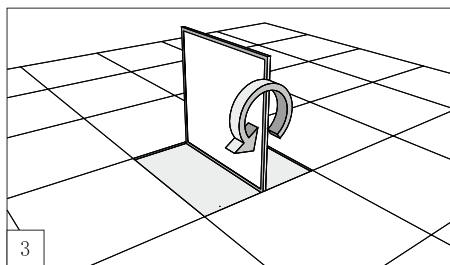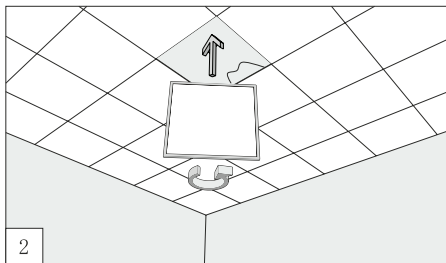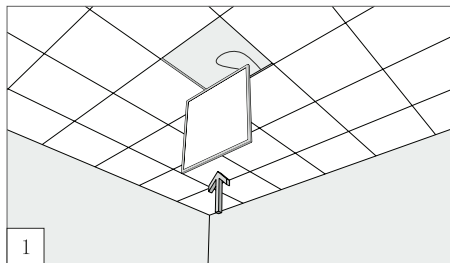

NOTES

1. The LED panel can be covered with insulation; however, the LED Driver must be placed on top of the insulation. Covering the LED driver will cause it to fail prematurely and void the warranty.